



REDPATH FLEET OF RAISE DRILLS

Extended Height	200" (5.08 m)
Footprint Width	78" (1.98 m)
Footprint Depth	76" (1.93 m)
Weight	44,000 lbs (19,958 kg)
Thrust System	
Maximum Upream Force	N/A
Maximum Conventional Ream Force	1,200,000 lbs (5,337 kN)
Maximum Downream Force	N/A
Rotation System	
Reaming Torque	200,000 ft / lbs (271 kN.m)
Nominal Parameters	
Pilot Hole Diameter	12 1/4" (311 mm)
Drill Pipe Diameter	11 1/4" (286 mm)
Hole Diameter Downream	N/A
Hole Diameter Upream	N/A
Hole Diameter Conventional	13' (4 m)
Raise Length Conventional	1500' (457 m)
Raise Angle	45 - 90°
Options	
Redtrax Transporter	Yes
Erector System	Yes




REDTRAX COMPATIBLE

REDBORE 80

The Redbore 80 is a mid-sized raisedrill ideally suited for surface and underground raises, ore and waste passages, along with infrastructure raises in the 13' (4 m) diameter range, with depths up to 1500' (457 m). The machine's compact and lightweight design, allows for a convenient fit into

smaller underground excavations resulting in savings of time and money. Drill operation includes state-of-the-art PLC and digital controls. It is also fully compatible with directional drilling technology, allowing the drill to deliver vertical excavation when needed.

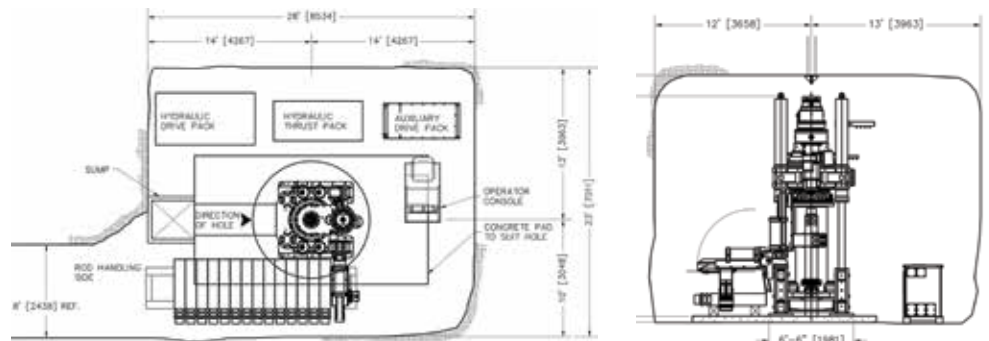

* Electrical systems built to suit regional requirements

Note: Drill specifications including thrust, torque, weights and dimensions are approximate and may vary from those provided.

Tel.: 1.705.474.2461 | Info.raisedrills@redpathmining.com | redpathmining.com