



# REDPATH FLEET OF RAISE DRILLS

Extended Height	114" (2.89 m)
Footprint Width	100" (2.54 m)
Footprint Depth	85" (2.15 m)
Weight	27,000 lbs (12,246 kg)
<b>Thrust System</b>	
Maximum Upream Force	500,000 lbs (2,224 kN)
Maximum Conventional Ream Force	N/A
Maximum Downream Force	N/A
<b>Rotation System</b>	
Reaming Torque	100,000 ft / lbs (135 kN.m)
<b>Nominal Parameters</b>	
Pilot Hole Diameter	13 3/4" (349 mm)
Drill Pipe Diameter	11 15/16" (303 mm)
Hole Diameter Downream	N/A
Hole Diameter Upream	79" (2 m)
Hole Diameter Conventional	N/A
Raise Length	198' (60 m)
Raise Angle	90°
<b>Options</b>	
Redtrax Transporter	Yes
Erector System	Yes





REDTRAX COMPATIBLE

## REDBORE 60UR

The Redbore 60UR has been specifically designed to meet industry demand for larger upream holes (blindhole or boxhole) while maintaining a low machine profile. This allows mine operators to improve productivity by achieving more versatility in block cave design.

Nominal capacities for the machine range 79" (2 m) in diameter, up to 198' (60 m) in length.

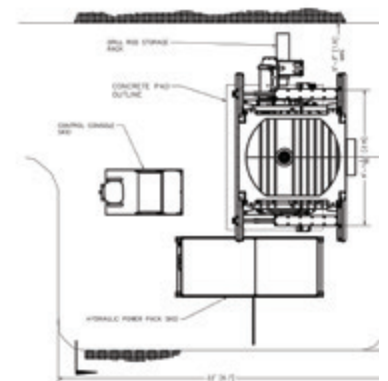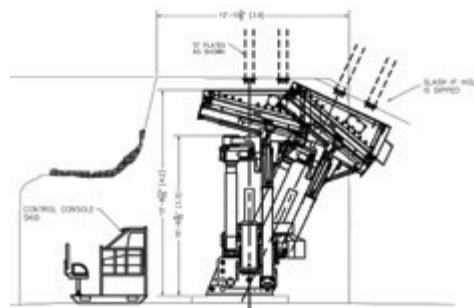

\* Electrical systems built to suit regional requirements  
 \* Deflectors are optional, must be added to overall height of machine  
 \* Upream values are nominal, diameter and length are site-specific  
 Note: Drill specifications including thrust, torque, weights and dimensions are approximate and may vary from those provided.